




PCT/IB 04 / 0 2 3 8 3

22.07.04



INVESTOR IN PEOPLE



The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1804/2323

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

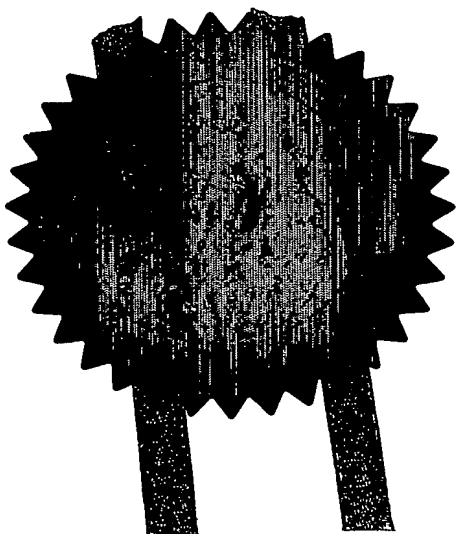


Signed

Dated 22 April 2004

**BEST AVAILABLE COPY**

Patents Act 1977  
(Rule 16)



The  
**Patent  
Office**

1/77

**Request for grant of a patent**  
(See notes on the back of this form. You can  
also get an explanatory leaflet from the Patent  
Office to help you fill in this form)

**The Patent Office**

Cardiff Road  
Newport

28JUL03 0823700 3 10/2079  
P01/7700 0.00-0317571.8

1.	Your reference	PHGB030121GBP		
2.	Patent application number (The Patent Office will fill in this part)	0317571.8		
3.	Full name, address and postcode of the or of each applicant ( <u>underline all surnames</u> )	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS 07419294001		
	Patents ADP Number (if you know it)			
	If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS		
4.	Title of the invention	CONTENT IDENTIFICATION FOR BROADCAST MEDIA		
5.	Name of your agent (if you have one)			
	"Address for service" in the United Kingdom (including the postcode)	Philips Intellectual Property & Standards Innovation Reform Surrey RH1 5HA		
	Patents ADP number (if you know it)	08359655001		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority Application number	Date of filing
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description	14
Claims(s)	8
Abstract	1
Drawings	5 <del>18</del>

1 see *Ph*

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents  
Statement of inventorship and right  
to grant of a patent (*Patents Form 7/77*)  
Request for preliminary examination and  
search (*Patents Form 9/77*)  
Request for substantive examination  
(*Patents Form 10/77*)  
Any other documents  
(Please specify)

11. I/We request the grant of a patent on the basis of this application.

A G WHITE

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 815365

A G WHITE

## Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.  
b) Write your answers in capital letters using black ink or you may type them.  
c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.  
d) If you have answered "Yes" *Patents Form 7/77* will need to be filed.  
e) Once you have filled in the form you must remember to sign and date it.  
f) For details of the fee and ways to pay please contact the Patent Office.

## DESCRIPTION

## CONTENT IDENTIFICATION FOR BROADCAST MEDIA

5 **Technical Field of the Invention**

The present invention relates to methods and apparatus for embedding content identification information into a media stream such as a video data stream.

10

**Background Art**

When media content, such as pictures, audio files, video files and the like, are distributed across a network, eg. a peer-to-peer network, it is difficult  
15 for the end user to be sure that the media content is what it purports to be. Problems can arise in a number of circumstances.

For example, an ID3 tag placed in an MP3 file labels the content of the file, eg. with the track title. However, this tag is only placed in the file once. If the recording that generated the file was stopped prior to the completion of the  
20 source file, then the tag is eliminated, and the file content becomes unknown.

In another example, the media content may have been deliberately labelled to pretend to be something that it is not, or to attribute the media content to a false source of origin. Some peer-to-peer technologies attempt to overcome this problem by using a hashing function on data derived from the  
25 media content to form a 'watermark' that cannot easily be tampered with by the end user.

There are a number of existing systems proposed for inserting 'watermark' information into video data streams for the purposes of authentication. An example is described in US 2002/0178368, which utilises a  
30 two-stage system to generate a robust watermark component and a fragile watermark component. The fragile component is designed so that the watermark is easily damaged or destroyed when under attack so that a hacker

cannot use it. However, the robust component is designed so that it does not lose its integrity when normal media stream delivery operations are performed on it. For example, normal transcoding operations to reduce bit rate when the data stream is to be transferred over a low bandwidth channel will leave the  
5 robust watermark component intact.

In the system of US 2002/178368, extracted feature data  $M_F$  and  $M_R$  are derived from block level data of an MPEG I-frame and these data are fed into a hashing algorithm, and the output is subjected to private / public key encryption and the resulting watermark information is embedded into the video  
10 stream at two different levels to provide the fragile component and the robust component which respectively enable detection of tampering at the block level and the group level.

A problem with the use of hash functions is that they will only produce the same data output if the two media data streams are bit-for-bit identical. If  
15 two different devices record the same broadcast content (eg. from a digital satellite), they will not be bit-for-bit identical. This will be due not least because of different times at which the respective recordings stopped and started, and also because of any transmission drop outs that occurred during reception of the broadcast.

20

### **Object of Invention**

It is an object of the present invention to provide a secure method of providing content identification and / or authentication on media data streams  
25 that may not be bit-for-bit identical.

It is a further object of the invention to provide a method of providing content identification and / or authentication on media data streams that may not be co-extensive in length such that a content tag may be missing.

It is a further object of the invention to provide a method for reliably  
30 enabling comparison of two differing media data streams to establish whether they relate to the same media content.

### **Summary of Invention**

According to one aspect, the present invention provides a method for providing content identification within a media data stream comprising the steps of:

receiving a data stream of media content;  
inserting content identification data at regular intervals within the media data stream.

According to another aspect, the present invention provides a method for providing tamper resistant content identification within a media data stream, comprising the steps of:

receiving a data stream of media content;  
extracting data relating to a predetermined property of the media data stream;

combining the extracted data with content identification data;  
forming a hash code from the combined data;  
applying a digital signature to the hash code; and  
inserting the hash code and digital signature as secured content identification data into the data stream.

According to another aspect, the present invention provides a method of transcoding a media data stream comprising the steps of:

receiving a data stream of media content including embedded, secured content identification data, in which the secured content identification data incorporates data relating to a predetermined property of the media data stream;

transcoding the media content of the data stream into a new format;  
extracting data relating to a predetermined property of the media data stream in its new format;

extracting content identification data from the secured content identification data;

combining the extracted data with the extracted content identification data;

applying a digital signature to the combined data; and  
inserting the combined data and digital signature as re-secured content  
identification data into the data stream.

According to another aspect, the present invention provides a method  
5 of verifying the integrity of secured content identification data embedded in a  
media data stream, comprising the steps of:

receiving a data stream of media content including embedded, secured  
content identification data, in which the secured content identification data  
incorporates data relating to a predetermined property of the media data  
10 stream;

extracting first data relating to a predetermined property of the media  
data stream;

extracting content identification data from the secured content  
identification data;

15 extracting second data relating to the predetermined property from the  
secured content identification data;

comparing the first data and the second data to verify the authenticity of  
the extracted content identification data.

According to another aspect, the present invention provides an  
20 apparatus for providing content identification within a media data stream  
comprising:

means for receiving a data stream of media content; and

means for inserting content identification data at regular intervals within  
the media data stream.

25 According to another aspect, the present invention provides an  
apparatus for transcoding a media data stream, comprising:

means for receiving a data stream of media content including  
embedded, secured content identification data, in which the secured content  
identification data incorporates data relating to a predetermined property of the  
30 media data stream;

a transcoder module for transcoding the media content of the data  
stream into a new format;

a data extraction module for extracting data relating to a predetermined property of the media data stream in its new format and for extracting content identification data from the secured content identification data;

means for combining the extracted data with the extracted content  
5 identification data;

an encryption module for applying a digital signature to the combined data; and

a data merge module for inserting the combined data and digital signature as re-secured content identification data into the data stream.

10 According to another aspect, the present invention provides an apparatus for verifying the integrity of secured content identification data embedded in a media data stream, comprising:

means for receiving a data stream of media content including embedded, secured content identification data, in which the secured content  
15 identification data incorporates data relating to a predetermined property of the media data stream;

a data extraction module for extracting first data relating to a predetermined property of the media data stream;

a decryption module for extracting content identification data from the  
20 secured content identification data; and for extracting second data relating to the predetermined property from the secured content identification data; and

a compare module for comparing the first data and the second data to verify the authenticity of the extracted content identification data.

## 25 **Brief Description of the Drawings**

Embodiments of the present invention will now be described by way of example and with reference to the accompanying drawings in which:

Figure 1 shows a schematic block diagram of an apparatus for inserting  
30 content identification information into a media data stream;



Figure 2 shows a schematic block diagram of a transcoder device for transcoding the media stream output of the device of Figure 1, while maintaining the integrity of embedded content identification information;

Figure 3 is a flowchart illustrating the steps of inserting content  
5 identification information into a media data stream;

Figure 4 is a schematic block diagram of a receiving device for extracting and verifying content identification information embedded in a data stream; and

Figure 5 is a flowchart illustrating the steps of extracting and verifying  
10 content identification information embedded in a data stream.

### **Specific Description of the Embodiments**

With reference to Figure 1, a programme of media content is provided for  
15 broadcast, transmission or other form of distribution, by a media content data source 10, as a media data stream 11. The source 10 also provides an identifier 12, to be repeatedly embedded into the media data stream 11.

The identifier 12 may be any item of identification data originated by the media content provider 10, for example indicating some nature of the media  
20 content. This 'content identification data' may include the identity of the content provider, the name or title of the media (eg. film name or song title), and / or information relating to its subject matter (eg. whether the media content is a pay-per-view movie or a free-to-view advert). The identifier 12 is to be embedded into the media data stream at frequent intervals, preferably  
25 regular or periodic intervals, for example within each frame of data to be transmitted to a third party device 19.

In a first aspect, the repeated inclusion of the content identification data, eg. into every frame of a movie, provides a first level of security making it difficult for an unauthorised third party to tamper with the identifier, in that it  
30 must be edited for each and every occurrence. In addition, if a recording of the movie is terminated early, or not started at the beginning, it will still be

possible to ascertain the identity of the media stream since the identifier is repeated at frequent intervals.

Therefore, in principle, this identifier 12 could be used by any receiving devices to verify that two copies of the media data stream 11 are in fact the same. However, on its own, the identifier 12 is not ideal because it is still relatively easy for a fraudulent third party to insert the same identifier into any content they choose, simply by copying the identifier. In practice, the identifier 12 should preferably be protected in such a manner that it cannot easily be inserted into a media data stream 11 and such that any identifier can be verified as authentic, eg. belonging to a particular broadcast source. The verifiability of authenticity of the identifier enables a receiving device to decide whether the source of the transmitted media data stream is a trustworthy source.

The first step to providing tamper resistance of the identifier is to use some rapidly changing property of the media data stream that is difficult to alter. For example, in an MPEG2 video data stream, the rapidly changing property may comprise one or more of: a PID (the transport stream identifier); one or more PCR clock signals in the stream, a continuity count that increments for each data packet; a frame size; and a hashcode for a selected frame.

The frame size property may be the size in bytes of a compressed frame of video or audio or still picture. The frame hashcode may be the result of passing the compressed bytes of the video, audio or still picture through a selected hashing function. The PID may be any stream identifier for an interleaved or multiplexed set of separate data streams.

Preferably, the rapidly changing property of the data stream 11 is one which changes with each video data frame. More preferably, the rapidly changing property is a combination of the frame size and the frame hash. The rapidly changing property is used to generate or extract data that can be combined with the identifier to make it difficult to copy and insert identifiers.

Data relating to the rapidly changing property is extracted by suitable data extraction module 13 and combined with the identifier 12 at a hash

function generator 14 to form a hash code output. Any appropriate mathematical combination of the extracted data and the content identification data may be used to generate the combined data, eg. hash code.

5 The hash code output of the hash function generator 14 is provided to an encryption module 16 together with the private key 15 of the source 10. The encryption module 16 digitally signs the hash code such that its authenticity can be verified by a third party having access to the corresponding public key of the source 10.

10 The digitally signed hash code output of the encryption module 16 (ie. the 'secured' content identification data) is then inserted into the data stream by a data merge module 17 to form output data stream 18. In preferred arrangements, the digitally signed hash code (secured content identification data) is inserted periodically and in conjunction with the data frame or block to which it relates, ie. by reference to the rapidly varying property from which the  
15 property data was extracted.

The output data stream 18 is passed to a receiving device 19 using any appropriate data transmission medium. This could be over a conventional wireless or wired transmission network in real time continuous transmission or packetised. Alternatively, the output data stream could be provided to the  
20 receiving device 19 by way of a suitable physical data carrier such as a disk, tape, random access memory or the like.

The stream property selected by data extraction module 13 for combination with the identifier 12 is preferably chosen to make it difficult to insert the identifier into an incorrect piece of content. For example, it would be  
25 almost impossible to engineer a video stream in such a manner that the frame size and hash codes of every I frame matched that of the inserted identifier.

The hashing function applied to the identifier 12 and the extracted stream property data make it very difficult to alter either the property or the identity because the hash would no longer be correct. The identifier 12 is used  
30 by a receiving device 19 to determine the true content and/or origin of the data as provided by the data source 10. The digital signature applied by encryption module 16 makes it impossible to alter the identifier without detection, because

decryption using the public key of the source 10 would no longer provide an output that matched the identity of the source 10.

The various elements of the media data stream generator of Figure 1 (eg. data extraction module 13, hash function generator 14, encryption module 5 16 and data merge module 17) may be implemented as hardware or software modules within a media data stream generator device. The embedding of the identifier into the media data stream may be carried out in real time during creation of the data stream or after creation / copying of the media data stream. Where the selected stream property includes a hash of frame data, 10 the hash function generator 24 may also compute the frame hash prior to carrying out the hash combination with the identifier 22.

The particular frame data stream property used may be chosen to be one that will survive any authorised data processing of the data stream, eg. re-multiplexing.

15 One method of compromising the security of a digitally signed identifier is to provide a receiver device 19 with a false public key. In this way, the identifier 12 can be corrupted or altered by a fraudulent party, and a false public key distributed so that the receiver device cannot detect the lack of a genuine signature on the data. In this way, the fraudulent party can falsely 20 sign media content such that any receiving device using the false public key will obtain a matching signature.

The conventional way to provide security against such fraudulent activity is to use public key certificates. A certificate contains the public key of the data source 10 and the identity and digital signature of a trusted third party. 25 If the third party is trusted, then the certificate can be assumed to contain the true public key of the source 10. There is usually provided a tree of certificates eventually ending up at one of a few root certificate authorities that are well known as trusted third parties.

The certification tree can be used in the tamper resistant content 30 identifier system described above to detect who created the identifier 12. The signature embedded in the broadcast media data stream 18 received by the receiving device 19 can be checked against the certificate of the body that

created the identifier. The certificate can be transmitted in the broadcast data stream or provided by some other means such as by download over the internet.

5 A further enhancement to the content identification system described above is to enable the detection of editing of the content. This can be achieved by the addition of a continuity count within the identifier, preferably inserted prior to application of the hashing function by the hash function generator 14. Alternatively, the continuity count could be added after the hashing function and before digital signature by the encryption module 16. In  
10 either way, the continuity count is also protected by the digital signature. The continuity count comprises a data field that increments in a known or predictable manner each time the identifier is inserted into the media data stream 11. A receiving device 19 can thereby detect unauthorised editing to the media content of the data stream by detecting any discontinuity in the  
15 embedded continuity count.

There are many situations in which a receiving device 19 may wish to alter the bit rate of a media data stream 13 that it has received from a data source 10. Examples of this are when the data stream is to be transcoded for use by a subsequent receiving device or transmission channel which operates  
20 at a lower bandwidth, lower audio or video output resolution or which generally otherwise requires some other restriction on the data. If this transcoded data stream is subsequently passed to another receiving device, the broadcaster may desire that this compromised quality of the original data stream is made evident to the end user.

25 When the data stream is transcoded, the stream property values in the embedded identifier will no longer match those derivable from the media data stream. Thus, to a receiving device, it will appear that the content identification provided by the identifier 12 is not authentic.

With reference to Figure 2, to correct for this (if the transcoding  
30 operation is authorised), a transcoding device 20 receives the data stream 21 that includes the embedded and digitally signed identifiers, and replaces the identifiers with recalculated identifiers based on the newly changed properties

of the data stream. Firstly, a transcoder module 20a transcodes the media data stream to its new format, eg. with lower video resolution for transmission over a lower bandwidth transmission channel. A data extraction module 23 recalculates the data stream properties for use with a new or modified identifier 22 and strips the original identifiers out of the transcoded data stream.

A hash function generator 24 then generates a new hash code output based on the recalculated data stream property and the new or modified identifier 22. The new identifier 22 may comprise data identifying the transcoding device 20 as the new data source. The new identifier 22 may retain other original data from the original identifier, if appropriate.

The hash code output of the hash function generator 24 is provided to an encryption module 26 together with the private key 25 of the transcoder 20. The encryption module 26 digitally signs the hash code such that its authenticity can be verified by a third party having access to the corresponding public key of the transcoder 20.

The digitally signed hash code output of the encryption module 26 is then inserted into the transcoded data stream by a data merge module 27 to form transcoded output data stream 28.

The output data stream 28 may be passed to a receiving device 29 using any appropriate data transmission medium as previously described.

Any receiving device 29 receiving this transcoded data stream will be able to check that the identifiers match the information blocks of the media data stream to which they relate by decrypting the digitally signed identifiers using the public key of the transcoder device 20. The receiving device can use the tree of certificates to verify that the public key is authentic and that the media content is authentic.

Furthermore, to verify that the transcoding device has the authority of, or approval of, the original media content data source and provider of the original content identification data (eg. broadcaster), it is possible for the public key of the transcoding device to be digitally signed by the original content data source as well as, or instead of, the trusted third party (eg. certification authority).

Thus, as part of the signature process, the transcoding device also makes available its public key in a form that is digitally signed by the broadcasting authority or the originator of the secured content identification data. The broadcaster, or originating source 10 would only sign the public key of transcoding devices that it trusted not to label the media content incorrectly. For example, a transcoder device may modify the data stream and sign the modified identifier. When another device receives the modified stream, it will detect that the stream has been signed by another party other than the original broadcaster. However, by checking the public key of the transcoder device, the receiving device can establish that the key has been signed by another trusted party, preferably the original broadcaster.

An exemplary method for inserting the identifier data is now described in connection with Figure 3. In this example, a broadcaster or other source (eg. 10, figure 1) wishes to insert the identifier "crid://broadcaster.co.uk/ShopstarsEpisode12" to their broadcast of episode 12 of their series called "Shopstars", ie the generated media content of step 30. On the broadcast channel, the broadcaster transmits (step 31) their name (eg. "broadcaster.co.uk"), their public key (eg. "AAA-AAAA"), the name of the signature authority (trusted third party) verifying the public key (eg. "intertrust.com") and the public key signed by the signature authority (eg. "ZZZZZZZ") so that the public key can be verified, by any receiving device, as the true public key of the broadcaster.

When episode 12 of "Shop Stars" is being broadcast, a first data frame of the media content is obtained (step 32) and the selected property data for that frame are extracted / calculated from the frame data (step 33). The identifier message "crid://broadcaster.co.uk/ShopstarsEpisode12" is hashed with the extracted / calculated property data (step 34).

For example, the selected property may be the size of the last I frame, and the MD5 sum (hash function) of the last I frame, which is combined with the broadcaster name "broadcaster.co.uk", and the identifier message "crid://broadcaster.co.uk/ShopstarsEpisode12" to obtain an MD5 sum. This sum, being the hash code for insertion into the data stream, is digitally signed

using the private key of the device (steps 35 and 36) and inserted into the transmitted data stream (step 37). The process then repeats for each successive new data frame, returning to step 32.

5 It will be noted that each time the identifier is inserted, the hash function is recalculated on the basis of new I frame data so that the identifier is intimately linked with the broadcast stream. In a preferred example, the size and hash of the previous I frame will change approximately twice every second.

10 With reference to Figure 4, a receiver device 29 will now be described in more detail. A data stream 40 is received by a data extraction module 41 that extracts (i) the predetermined property of the data stream that is used to verify the identifier, saved in register 43, and (ii) the respective copy of the secured identifier embedded in the data stream, saved in register 42.

15 The identifier 42 is passed to a decryption module 44 which extracts the hash code embedded and digitally signed in the identifier 22. This is compared with the calculated / extracted predetermined property 43 by a compare module 45. At the same time, the digital signature embedded in the identifier is checked by a signature verification module 46 by obtaining the public key 47 of the appropriate signature authority or authorities. This may  
20 involve obtaining the public key of a certificating authority according to known practices, to verify the authenticity of the broadcaster's public key.

The method performed by the receiving device 29 to verify the authenticity of the inserted identifiers is described in connection with figure 5. The receiving device 29 obtains a first I frame (step 50) and an adjacent,  
25 embedded or related identifier (step 51). The receiver extracts the appropriate data property from the data stream (step 52). As previously described, this may comprise any suitable rapidly changing property of the data stream 11, eg. one which changes with each video data frame. In a preferred arrangement, the rapidly changing property is a combination of the frame size and the frame hash. In a preferred arrangement, a hash code of this property  
30 or properties is generated.



Contemporaneously, the related identifier is decrypted (step 54) to extract (step 55) the inserted identifier, which is a combination of the content identification data (eg. source identity) and the data stream property. The data stream property extracted from the embedded identifier is compared with the  
5 newly generated property (step 56). The extracted content identification data is then used to determine the broadcaster ID and the certifying authority (trusted third party) ID (step 57). This is then used to obtain the public key of the broadcaster (step 58) and to then verify the integrity of the identifier (step 59). The public key of the certifying authority is then obtained (step 60) and  
10 verification of the certificate made (step 61). If the authenticity of the identifier information is fully verified, the identifier information (eg. broadcaster ID and media stream information) can be output for the user (step 62).

Other embodiments are intentionally within the scope of the appended claims.

## CLAIMS

1. A method for providing content identification within a media data stream comprising the steps of:

5 receiving a data stream of media content;  
inserting content identification data at regular intervals within the media data stream.

2. The method of claim 1 wherein the content identification data is  
10 inserted every frame.

3. The method of claim 1 wherein the content identification data is digitally combined with a predetermined property of the data stream.

15 4. The method of claim 1 for providing tamper resistant content identification within the media data stream, in which the step of inserting content identification data comprises the further steps of:

extracting data relating to a predetermined property of the media data stream;

20 combining the extracted data with content identification data;  
applying a digital signature to the combined data; and  
inserting the combined data and digital signature as secured content identification data into the data stream.

25 5. The method of claim 4 in which the step of combining the extracted data with content identification data comprises the step of forming a hash code from the extracted data and the content identification data.

30 6. The method of claim 1 in which the media data stream may comprise any one or more of pictures and audio or video data streams.

7. The method of claim 3 in which the predetermined property is any property of the media data stream that changes from data frame to data frame.

5 8. The method of claim 7 in which the predetermined property comprises any one or more of: frame size, frame hash, transport stream identifier, clock signal, and continuity count.

9. The method of claim 8 in which the predetermined property is a  
10 combination of frame size and frame hash.

10. The method of claim 5 in which the step of applying a digital signature to the hash code further includes applying digital signatures of the originator of the media data stream and a certification authority.

15

11. A method of transcoding a media data stream comprising the steps of:

receiving a data stream of media content including embedded, secured content identification data, in which the secured content identification data  
20 incorporates data relating to a predetermined property of the media data stream;

transcoding the media content of the data stream into a new format;

extracting data relating to a predetermined property of the media data stream in its new format;

25 extracting content identification data from the secured content identification data;

combining the extracted data with the extracted content identification data;

applying a digital signature to the combined data; and

30 inserting the combined data and digital signature as re-secured content identification data into the data stream.

12. The method of claim 11 in which the new format of the data stream has a lower resolution or transmission / storage bandwidth than the original format of the data stream.

5 13. The method of claim 11 in which the media content may comprise any one or more of pictures, audio, video data streams.

14. The method of claim 11 in which the predetermined property is any property of the media data stream that changes from data frame to data  
10 frame.

15. The method of claim 14 in which the predetermined property comprises any one or more of: frame size, frame hash, transport stream identifier, clock signal, and continuity count.  
15

16. The method of claim 15 in which the predetermined property is a combination of frame size and frame hash.

17. The method of claim 11 in which the step of applying a digital  
20 signature to the combined data further includes applying a digital signature of the transcoding device.

18. The method of claim 17 in which the step of applying a digital  
25 signature to the combined data further includes the step of making available a corresponding public key of the transcoding device that is digitally signed by the originator of the content identification data.

19. The method of claim 11 in which the step of combining the  
30 extracted data with the extracted content identification data further includes the step of modifying the extracted content identification data.

20. The method of claim 19 in which the step of modifying the extracted content identification data comprises including an indication of the new format of the transcoded data stream.

5        21. The method of claim 19 in which the step of modifying the extracted content identification data comprises including an identity of a device performing the transcoding.

22. A method of verifying the integrity of secured content  
10 identification data embedded in a media data stream, comprising the steps of:

receiving a data stream of media content including embedded, secured content identification data, in which the secured content identification data incorporates data relating to a predetermined property of the media data stream;

15        extracting first data relating to a predetermined property of the media data stream;

extracting content identification data from the secured content identification data;

20        extracting second data relating to the predetermined property from the secured content identification data;

comparing the first data and the second data to verify the authenticity of the extracted content identification data.

23. The method of claim 22 in which the step of extracting content  
25 identification data from the secured content identification data comprises the steps of:

obtaining a public key of a content provider that secured the content identification data; and

30        verifying an encrypted signature of the content provider using the public key.

24. The method of claim 23 in which the step of extracting content identification data from the secured content identification data comprises the steps of:

- obtaining a public key of a certification authority;
- 5 verifying the authenticity of the public key of the content provider using the public key of the certification authority.

25. The method of claim 22 in which the media data stream is received via a transcoding device, and in which the step of extracting content  
10 identification data from the secured content identification data comprises the steps of verifying that the transcoder device was authorised to modify the data stream by an originator of the content identification data.

26. The method of claim 25 in which the step of extracting content  
15 identification data from the secured content identification data comprises the steps of:

- obtaining a public key of the transcoding device that secured the content identification data, the public key being digitally signed by the originator of the content identification data;
- 20 obtaining a public key of the originator;
- verifying an encrypted signature of the originator using the public key of the originator, and thereby verifying the public key of the transcoder device;
- verifying the content identification information using the verified public key of the transcoder device.

25

27. The method of claim 22 in which the media content may comprise any one or more of pictures, audio, video data streams.

28. The method of claim 22 in which the predetermined property is  
30 any property of the media data stream that changes from data frame to data frame.

29. The method of claim 28 in which the predetermined property comprises any one or more of: frame size, frame hash, transport stream identifier, clock signal, and continuity count.

5        30. The method of claim 29 in which the predetermined property is a combination of frame size and frame hash.

31. Apparatus for providing content identification within a media data stream comprising:

10        means for receiving a data stream of media content;  
      means for inserting content identification data at regular intervals within the media data stream.

32. The apparatus of claim 31 wherein the means for inserting  
15 comprises:

      a data extraction module for extracting data relating to a predetermined property of the media data stream;  
      means for combining the extracted data with content identification data;  
      an encryption module for applying a digital signature to the combined  
20 data; and  
      a data merge module for inserting the combined data and digital signature as secured content identification data into the data stream.

33. The apparatus of claim 32 in which the means for combining  
25 includes a hash function generator for forming a hash code from the combined data, the encryption module applying the digital signature to the hash code.

34. Apparatus for transcoding a media data stream, comprising:  
means for receiving a data stream of media content including embedded,  
30 secured content identification data, in which the secured content identification data incorporates data relating to a predetermined property of the media data stream;

a transcoder module for transcoding the media content of the data stream into a new format;

a data extraction module for extracting data relating to a predetermined property of the media data stream in its new format and for extracting content  
5 identification data from the secured content identification data;

means for combining the extracted data with the extracted content identification data;

an encryption module for applying a digital signature to the combined data; and

10 a data merge module for inserting the combined data and digital signature as re-secured content identification data into the data stream.

35. Apparatus for verifying the integrity of secured content identification data embedded in a media data stream, comprising:

15 means for receiving a data stream of media content including embedded, secured content identification data, in which the secured content identification data incorporates data relating to a predetermined property of the media data stream;

a data extraction module for extracting first data relating to a  
20 predetermined property of the media data stream;

a decryption module for extracting content identification data from the secured content identification data; and for extracting second data relating to the predetermined property from the secured content identification data;

a compare module for comparing the first data and the second data to  
25 verify the authenticity of the extracted content identification data.

36. A computer program product, comprising a computer readable medium having thereon computer program code means adapted, when said program is loaded onto a computer, to make the computer execute the  
30 procedure of any one of claims 1 to 30.



37. A computer program product, distributable by electronic data transmission, comprising computer program code means adapted, when said program is loaded onto a computer, to make the computer execute the procedure of any one of claims 1 to 30.

## ABSTRACT

**CONTENT IDENTIFICATION FOR BROADCAST MEDIA**

5        A method and apparatus for repeatedly embedding content  
identification information ('identifiers') into a media data stream, such as an  
MPEG video data stream. The identifiers are embedded into the data stream  
using a hash function that binds an identifier with a rapidly varying property of  
the data stream so that it is difficult for an unauthorised device to insert false  
10 identifier information or to edit the identifier information. The identifier may be  
secured also with a digital signature. The method and apparatus also provides  
for transcoding of the data stream and re-calculation of the embedded  
identifier, by an authorised device, where the rapidly varying property of the  
data stream may be altered by the transcoding operation.

15

(Figure 1)

1/5

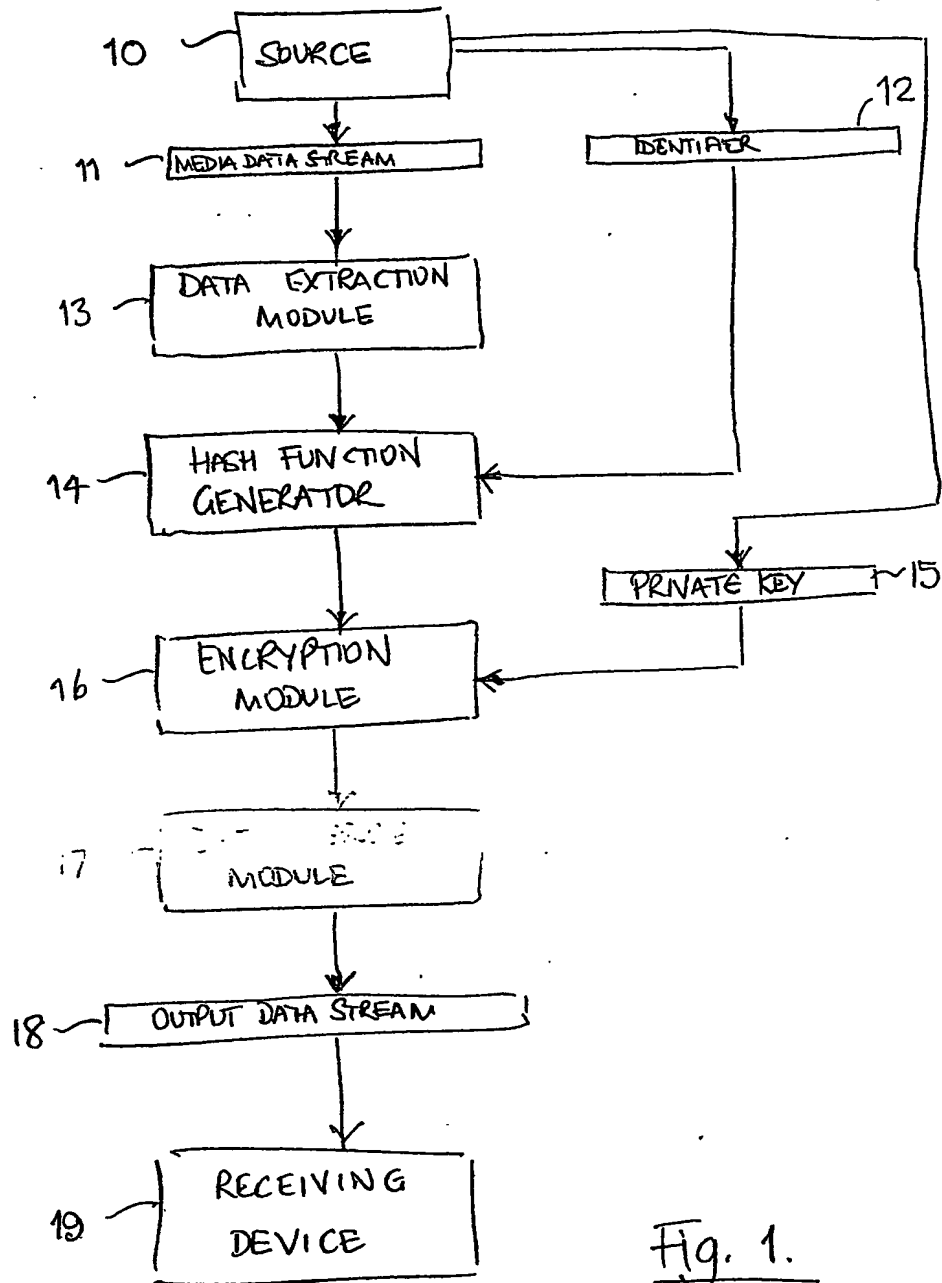


Fig. 1.

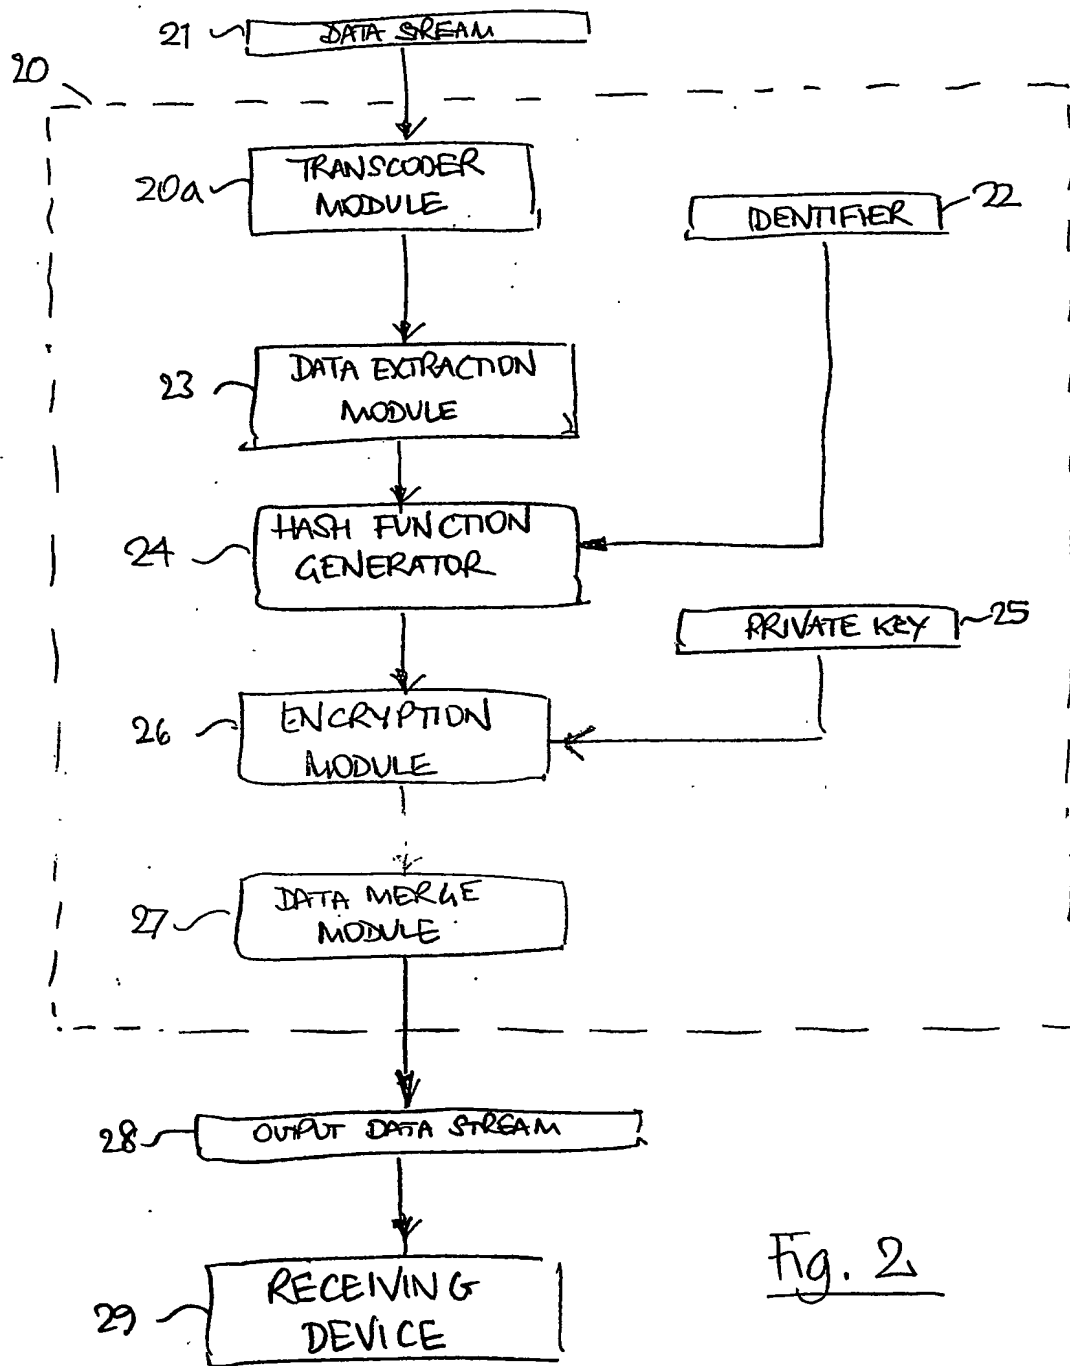


Fig. 2

3/5

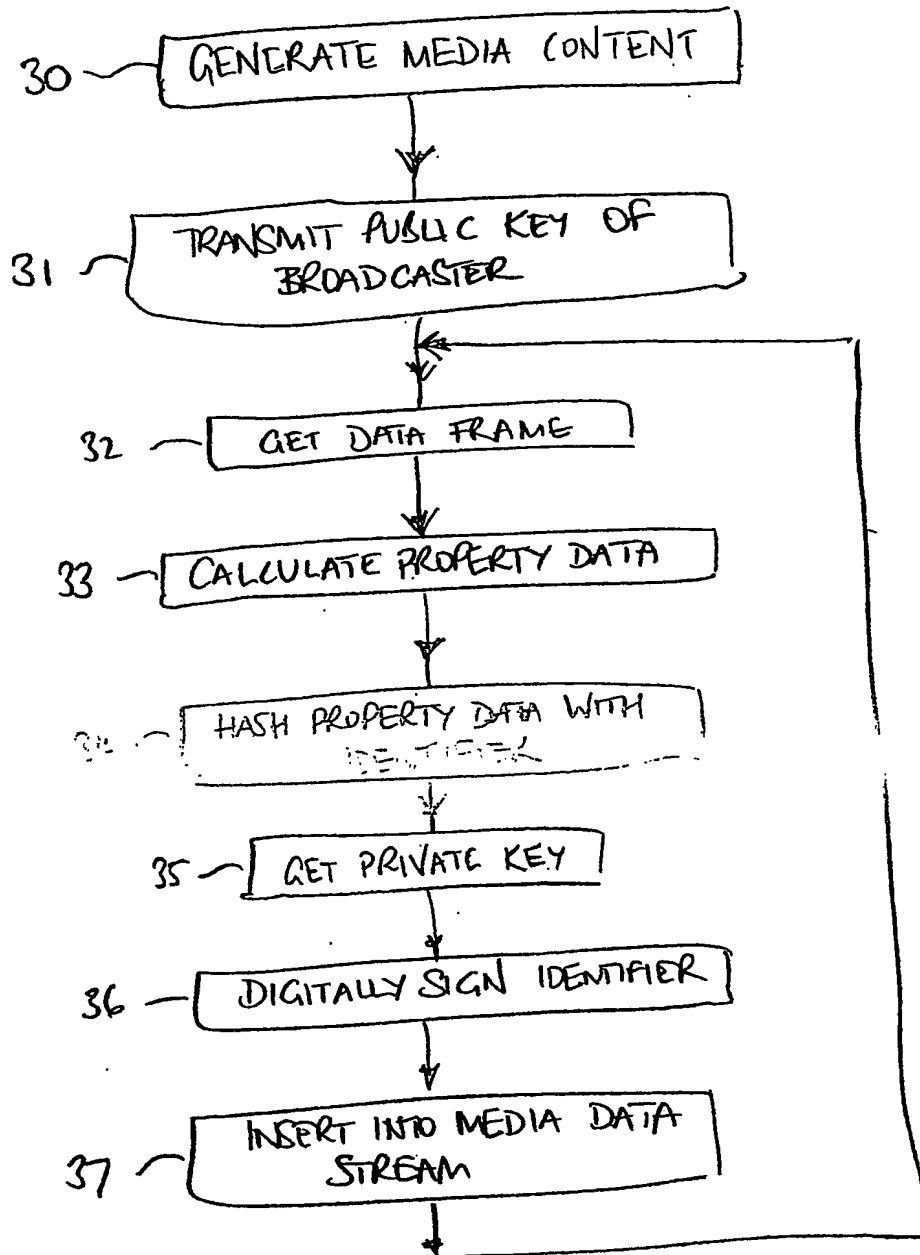


Fig. 3

4/5


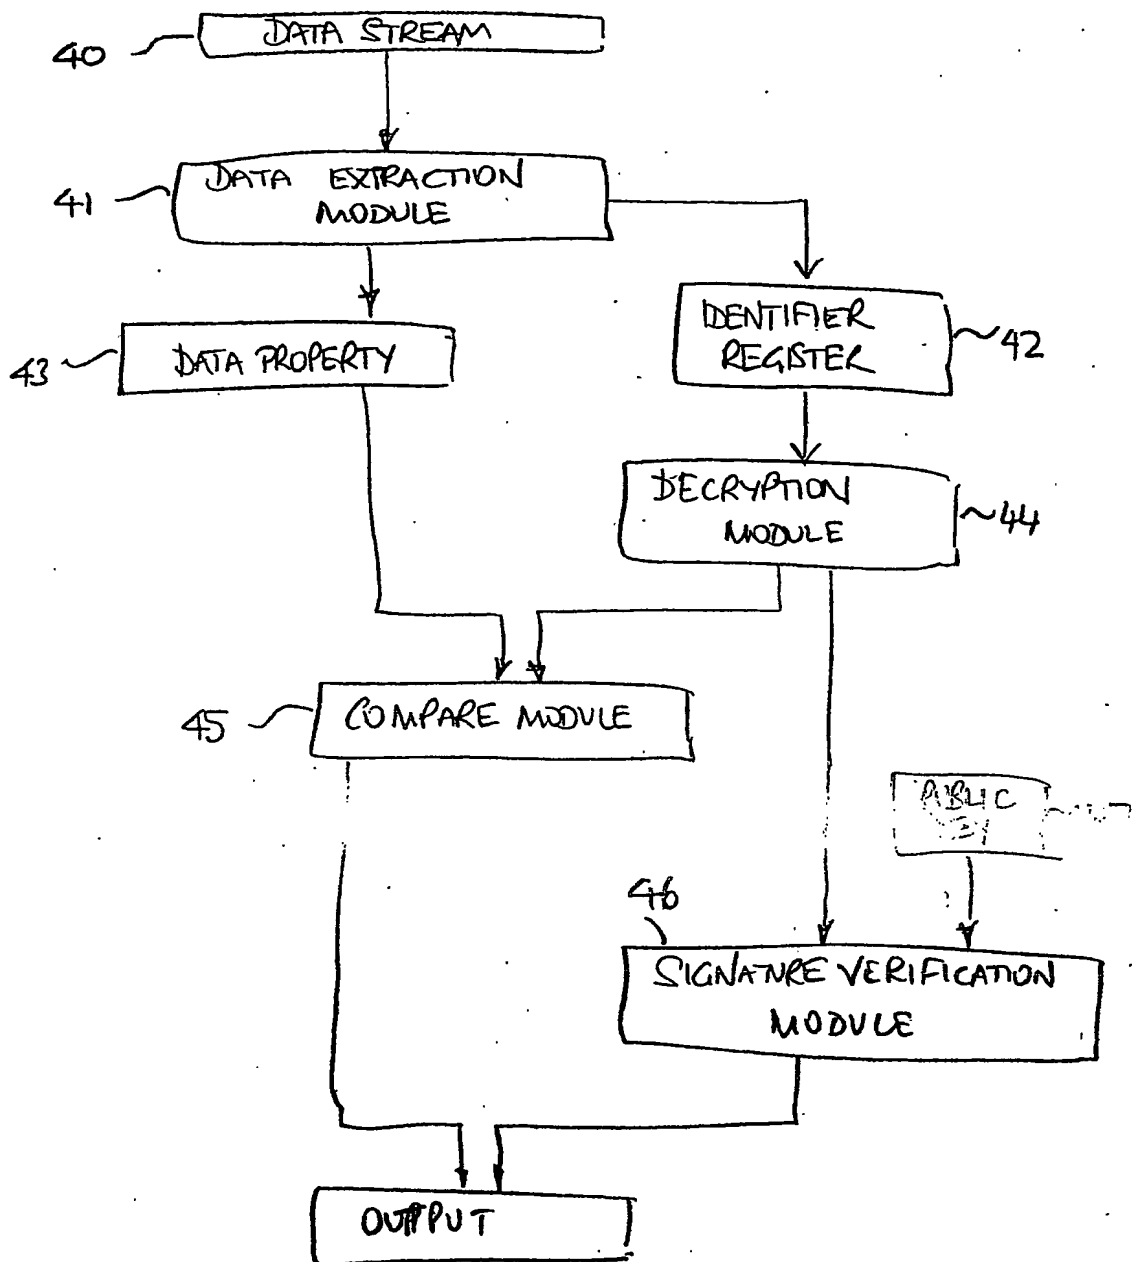


Fig. 4

5/5

Fig. 5

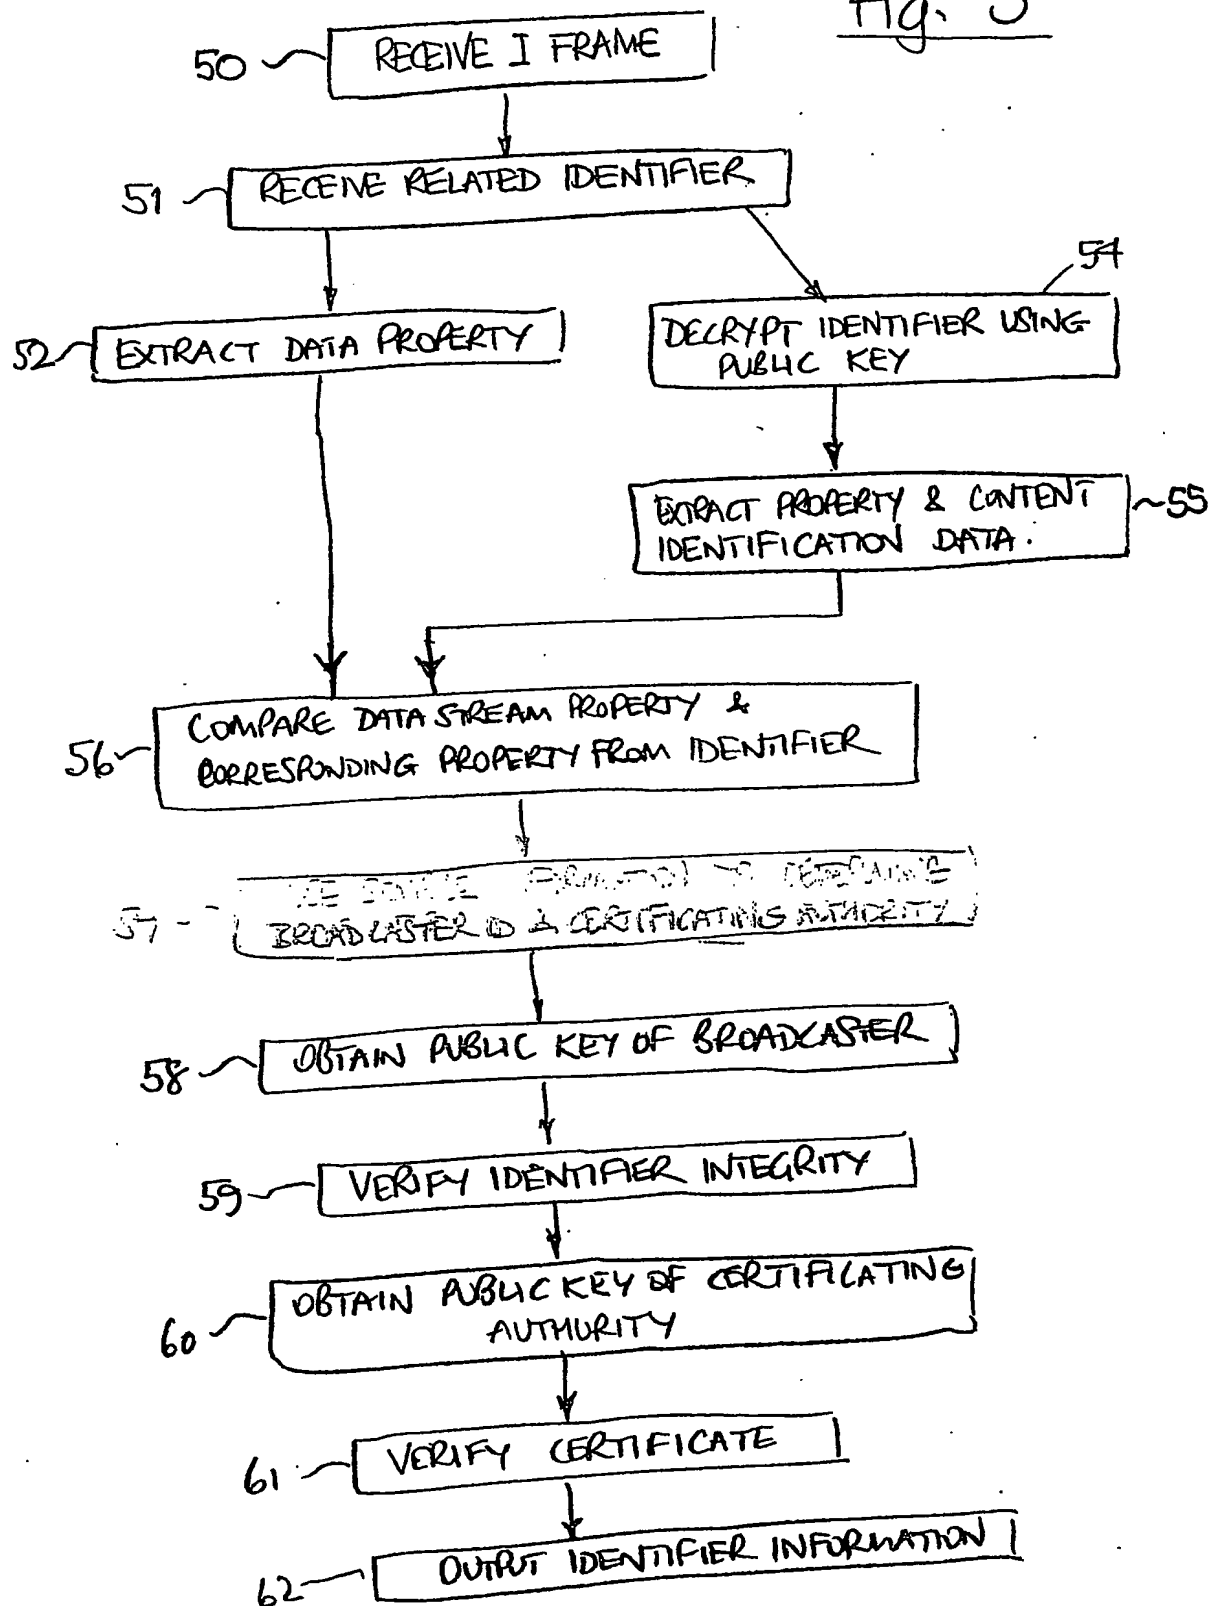

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**